


结构图

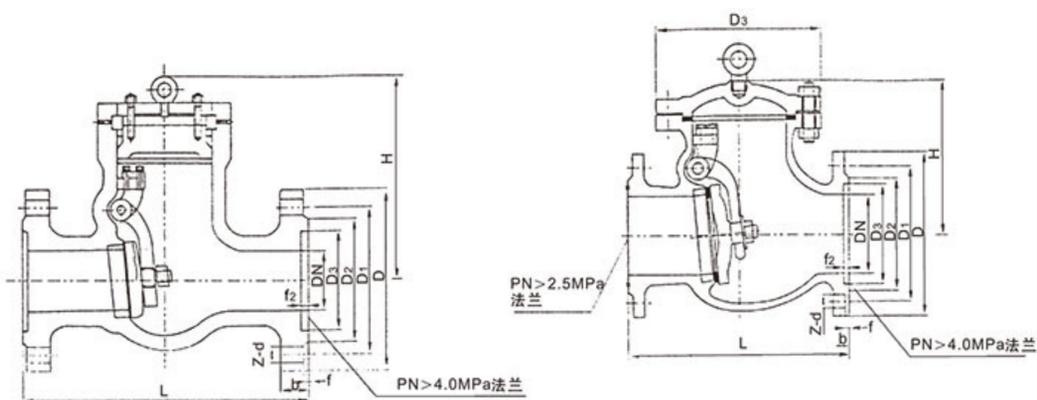

主要外形尺寸及连接尺寸

型号	公称通径 DN(mm)	外形尺寸和连接尺寸(mm)							
		L	D	D <sub>1</sub>	D <sub>2</sub>	b-f	Z-φd	D <sub>3</sub>	H
W H61H-16 Y	50	230	160	125	100	16-2	4-18	185	160
	65	290	180	146	120	18-3	4-18	215	177
	80	310	195	160	135	20-3	8-18	235	187
	100	350	215	180	155	20-3	8-18	255	202
	125	400	245	210	185	22-3	8-18	285	227
	150	480	280	240	210	24-3	8-23	330	263
	200	550	335	295	265	26-3	12-23	385	293
	250	650	405	355	320	30-3	12-25	455	330
	300	750	460	410	375	30-4	12-25	515	382
	350	850	520	470	435	34-4	16-25	545	430
W H61H-25 Y	400	950	580	525	485	36-4	16-30	600	480
	500	1150	705	650	608	44-4	20-34	730	560
	50	230	160	125	100	20-3	4-18	185	177
	65	290	180	145	120	22-3	8-18	215	192
	80	310	195	160	135	22-3	8-18	235	192
	100	350	230	190	160	24-3	8-23	260	217
	125	400	245	220	188	28-3	8-25	296	250
	150	480	300	300	218	30-3	8-25	330	270
	200	550	360	350	276	34-3	12-25	380	350
	250	650	425	370	332	36-3	12-30	430	410
W H61H-4.0 Y	300	750	485	430	390	40-4	16-30	490	430
	350	850	550	490	448	44-4	16-34	545	450
	400	950	610	550	505	48-4	16-34	600	560
	500	1150	730	660	610	52-4	20-41	730	618

主要外形尺寸及连接尺寸

公称压力 PN(MPa)	公称通径 DN(mm)	外形尺寸和连接尺寸/mm									
		L	D	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	b-f	f <sub>2</sub>	Z-d	D <sub>3</sub>	H
W H61H-4.0 Y	50	230	160	125	100	88	20-3	4	4-18	185	177
	65	290	180	145	120	110	22-3	4	8-18	210	192
	80	310	195	160	135	121	22-3	4	8-18	235	192
	100	350	230	190	160	150	24-3	4.5	8-23	260	217
	125	400	270	220	188	176	28-3	4.5	8-25	295	259
	150	480	300	250	218	204	30-3	4.5	8-25	330	270
	200	550	375	320	282	260	38-3	4.5	12-30	450	340
	250	650	445	385	345	313	42-3	4.5	12-34	500	401
	300	750	510	450	408	364	46-4	4.5	16-34	545	423
	350	850	570	510	465	422	52-4	5	16-34	570	460
W H61H-6.4 Y	400	950	655	585	535	474	58-4	5	16-41	625	490
	500	1150	755	670	612	576	62-4	5	20-48	730	618
	50	300	175	125	105	88	26-3	4	4-23	210	192
	65	340	200	160	130	110	28-3	4	8-23	235	207
	80	380	210	170	140	121	30-3	4	8-23	235	207
	100	430	250	200	168	150	32-3	4.5	8-25	270	235
	125	500	295	240	202	170	36-3	4.5	8-30	315	265
	150	550	340	280	240	204	38-3	4.5	8-34	360	297
	200	650	405	345	300	260	44-3	4.5	12-34	420	357
	250	775	470	400	352	313	48-3	4.5	12-41	480	405
W H61H-10.0 Y	300	900	530	460	412	364	54-4	4.5	16-41	560	465
	350	1025	595	525	475	422	60-4	5	16-41	615	514
	400	1150	670	585	525	474	65-4	5	16-48	675	568
	500	1400	800	705	640	576	70-4	5	20-54	735	620
	50	300	195	145	112	88	28-3	4	4-25	210	192
	65	340	220	170	138	110	32-3	4	8-25	235	207
	80	380	230	180	148	121	34-3	4	8-25	260	235
	100	430	265	210	172	150	38-3	4.5	8-30	295	265
	125	500	310	250	210	175	42-3	4.5	8-34	335	313
	150	550	350	290	250	204	46-3	4.5	12-34	425	360
W H61H-25.0 Y	200	650	430	312	312	260	54-3	4.5	12-41	450	420
	250	775	500	382	382	313	60-3	4.5	12-41	535	480

公称压力 PN(MPa)	公称通径 DN(mm)	外形尺寸和连接尺寸/mm									
		L	D	D <sub>1</sub>	D <sub>2</sub>	D <sub>3</sub>	b-f	f <sub>2</sub>	Z-d	H	
W H61H-16.0 Y	50	300	215	165	132	88	36-3	4	8-25	251	
	65	340	245	190	152	110	44-3	4	8-30	282	
	80	380	260	205	168	121	46-3	4	8-30	320	
	100	430	300	240	200	150	48-3	4.5	8-34	356	
	125	500	355	285	238	176	60-3	4.5	8-41	393	
	150	550	390	318	270	204	66-3	4.5	12-41	430	
	200	650	480	400	345	260	78-3	4.5	12-48	470	
	250	750	580	485	425	313	88-3	4.5	12-54	514	
	50	368	210	160	128	70	40-3	5	8-25	310	
	65	419	260	203	165	97	48-3	5	8-30	346	
W H61H-25.0 Y	80	470	290	230	190	116	54-3	5	8-34	385	
	100	546	360	292	245	138	66-3	6	8-41	406	
	125	673	385	318	270	170	76-3	6	12-41	534	
	150	705	440	360	305	190	82-3	6	12-45	560	
	200	832	535	440	380	245	92-3	6	12-51	618	
	250	991	670	572	508	319	110-3	6	16-55	673	